

Pin Headers

2.0 mm Pitch

- Current Rating: 1A
- Contacts : Phosphor Bronze
- Housing: PBT 30% Glass UL94VO

Part No 32-113 xx S/D V/R 2.0 mm Pitch



xx = No of Contacts

V = Straight

R = Right Angle

S = Single Row 2 to 40 way


D = Double Row 4 to 80 way

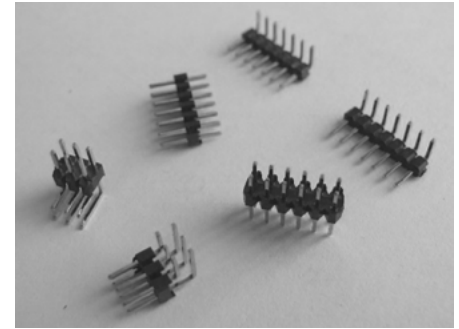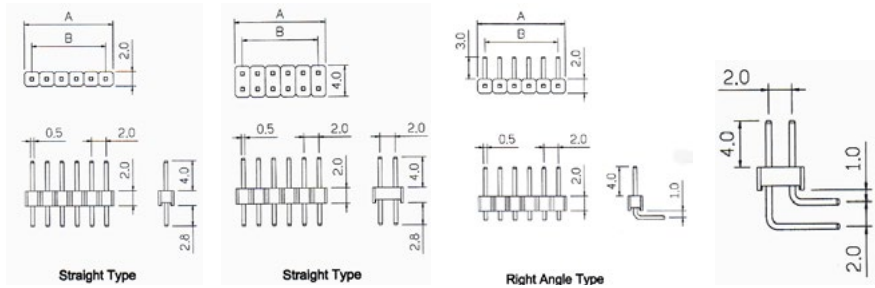


Mini Jumpers

2.0 mm Pitch

- Current Rating: 1A
- Contacts : Gold Plated Phosphor Bronze
- Housing: PBT 30% Glass UL94VO
- Insulation Resistance : 1000Mohm min. at 500V

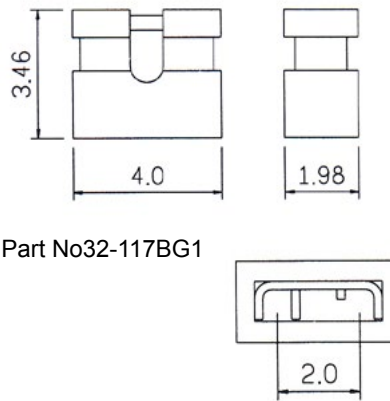

Part No 32-117BG1

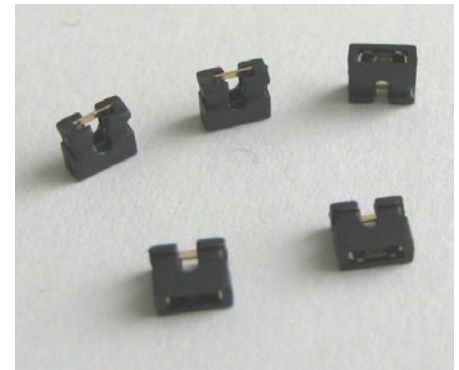

PCB Socket

2.0 mm Pitch

- Gold Plated Phosphor Bronze Contacts.
- Current Rating: 1A
- Housing PBT 30% Glass UL94VO.
- Dielectric Strength: 500VAC for 1 min.
- Operating Temp. -55°C to +105°C.

Part No 32-115 xx S/D V/R 2.0 mm Pitch

xx = No of Contacts

V = Straight

R = Right Angle

S = Single Row 2 to 40 way

D = Double Row 4 to 80 way

