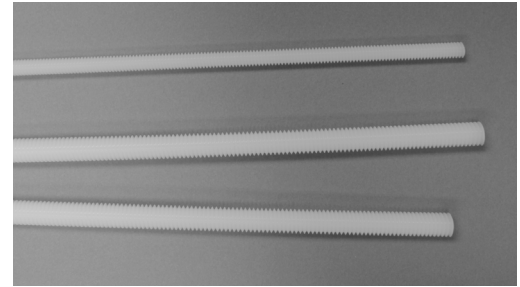


Misc. Nylon Threaded Rod







Threaded Rod

| Metric | | Imperial | |
|----------|---------------|-------------------|----------------|
| M3 x 1m | 08-PNS3-1000 | 3/4" - 10 x 2' | 08-X750-10-2 |
| M4 x 1m | 08-PNS4-1000 | 1/4" - 20 x 2' | 08-X025-20-2 |
| M5 x 1m | 08-PNS5-1000 | 3/8" - 16 x 2' | 08-X375-16-2 |
| M6 x 1m | 08-PNS6-1000 | 1/2" - 13 x 2' | 08-X500-13-2 |
| M8 x 1m | 08-PNS8-1000 | 5/8" - 11 x 2' | 08-X625-11-2 |
| M10 x 1m | 08-PNS10-1000 | 1" - 8 x 2' | 08-X1000-8-2 |
| M12 x 1m | 08-PNS12-1000 | PVC 1/4 - 20 x 2' | 08-025-20-2PVC |
| M14 x 1m | 08-PNS14-1000 | | |
| M16 x 1m | 08-PNS16-1000 | | |
| M18 X 1m | 08-PNS18-1000 | | |



Nylon Nuts

Nylon 6/6 is tough, durable and corrosion resistant in normal temperatures

| Screw Size |  |  |  |  |  |  |
|--------------|---|---|---|--|---|---|
| | Hex | Cap | Wing | Thumb | Deco Wing | Lock* |
| M2 | 09-PNN2 | - | - | - | - | - |
| M2.5 | 09-PNN2.5 | - | - | - | - | - |
| M3 | 09-PNN3 | - | 09-PNN3W | - | 09-PNN3WD | - |
| M4 | 09-PNN4 | 09-PNN4C | 09-PNN4W | 09-PNN4T | 09-PNN4WD | - |
| M5 | 09-PNN5 | 09-PNN5C | 09-PNN5W | - | 09-PNN5WD | - |
| M6 | 09-PNN6 | 09-PNN6C | 09-PNN6W | - | 09-PNN6WD | 09-PNN6L |
| M8 | 09-PNN8 | 09-PNN8C | 09-PNN8W | - | - | - |
| M10 | 09-PNN10 | 09-PNN10C | 09-PNN10W | - | - | - |
| M12 | 09-PNN12 | 09-PNN12C | 09-PNN12W | - | - | - |
| UNC 4-40 | 09-PNN440H | - | - | - | - | - |
| UNC 6-32 | 09-PNN632H | 09-PNN632C | 09-PNN632W | 09-PNN632T | - | 09-PNN632L |
| UNC 8-32 | 09-PNN832H | - | - | 09-PNN832T | - | - |
| UNC 1/4 - 20 | 09-X025HN | 09-X025CN | 09-X025WN | 09-X025TN | - | - |
| UNC 1/2 - 13 | 09-X050HN | 09-X050CN | 09-X050WN | - | - | - |

* For Steel Screws

Polycarbonate Screws & Nuts

One of the toughest, most dimensionally stable thermoplastics over a wide temperature range

- High heat deflection temperature rating – Melting point 154°C per ASTM D789.
- Unaffected by greases, oils, detergents, aliphatic hydrocarbons, most mineral acids and higher alcohols. It is attacked by chlorinated hydrocarbons and most aromatic solvents, ester and ketone. UL flammability UL94V2.
- White water transparency with a 90° light transmission.

Screws

| Part Number | Screw Size | Length mm | Head Diameter | Head Height |
|--------------|------------|-----------|---------------|-------------|
| 08-PPS3-06RP | M3 | 6 | 6 | 2.5 |
| 08-PPS3-10RP | | 10 | 6 | 2.5 |
| 08-PPS3-12RP | | 12 | 6 | 2.5 |
| 08-PPS4-08RP | M4 | 8 | 7.5 | 2.6 |
| 08-PPS4-12RP | | 12 | 7.5 | 2.6 |
| 08-PPS5-20RP | M5 | 20 | 9 | 3.5 |
| 08-PPS5-40RP | | 40 | 9 | 3.5 |
| 08-PPS6-20RP | M6 | 20 | 10 | 4.0 |
| 08-PPS6-40RP | | 40 | 10 | 4.0 |

Nuts

| Part Number | Thread Size | Height mm | Across Flats |
|-------------|-------------|-----------|--------------|
| 09-PPN3 | M3 | 2.4 | 5.6 |
| 09-PPN4 | M4 | 3.2 | 7.0 |
| 09-PPN5 | M5 | 4.0 | 8.0 |
| 09-PPN6 | M6 | 5.0 | 10.0 |