


## Cooling Fans - AC

We stock the Sunon AC fans below for High Performance and Reliability.  
The best choice for both service replacements and new manufacture.



### Model Numbering System - Example

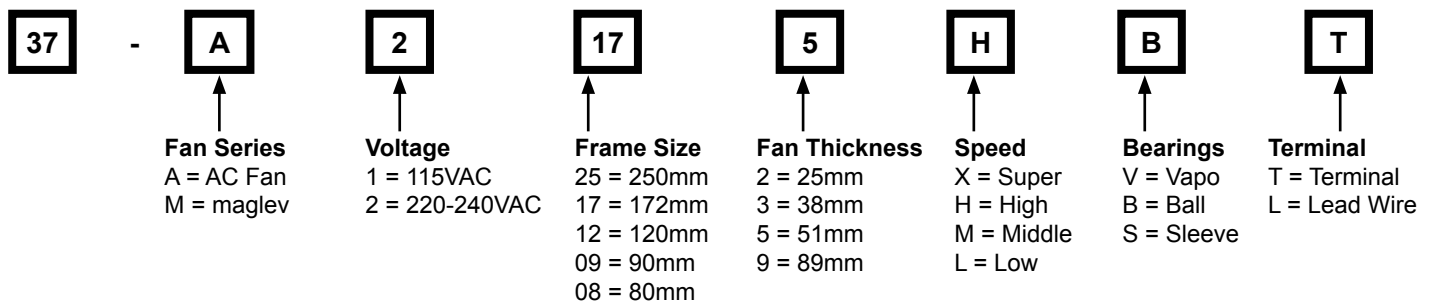

Part Number (Stock types)	Frame Size mm	Hole Centres	Operating Volts AC	AirFlow CFM	Current Amp	Speed RPM	Noise dBA
<b>AC Fans</b>							
37-MA2062HVL	60x60x25	50.0	220-240	17	0.10	3600	25
37-MA2082HVL	80x80x25	71.5	220-240	40	0.10	3200	32
37-2082HSL	80x80x25	71.5	220-240	17	0.07	2300	29
37-2083HBL	80x80x38	71.4	220-240	24	0.09	2400	32
37-1092HST	92x92x25	82.5	115	36	0.11	2750	39
37-MA2092HVL	92x92x25	82.5	220-240	52	0.10	2900	31
37-2092HBL	92x92x25	82.5	220-240	30	0.07	2350	37
37-2092HST	92x92x25	82.5	220-240	36	0.06	2750	39
37-2122HBL	120x120x25	104.8	220-240	66	0.09	2150	44
37-2122HBT	120x120x25	104.8	220-240	66	0.09	2150	44
37-2123HSL	120x120x38	104.8	220-240	85	0.125	2550	43
37-2123HST	120x120x38	104.8	220-240	85	0.125	2550	43
37-2123HBL	120x120x38	104.8	220-240	87	0.125	2750	45
37-2123HBT	120x120x38	104.8	220-240	87	0.125	2750	45
37-2123LBT	120x120x38	104.8	220-240	72	0.06	2150	37
37-A2175HBT-TC	171x151x51	162x134	220-240	203	0.11	2800	51
37-A2179HBT	176x176x89	152.74	220-240	315	0.11	2800	62
37-A2259MBT	254 Ø x 89	245.5	220-240	600	0.12	1400	50
37-A2259HBT	254 Ø x 89	245.5	220-240	770	0.24	1900	55
37-1123HBT	120x120x38	104.8	110-120	87	0.21	2750	45
37-A300	Power Lead with moulded connector, 300mm long						
37-A1000	Power Lead with moulded connector, 1000mm long						

Other sizes available Specifications all at 50Hz at the voltage shown. 37-A2175HBT-TC; 37-2179 & 37-2259 types are Alveolate motors